


电磁阀连接器-A型插座


图例  
Figure

尺寸图  
Drawing

A型圆形螺纹安装插座

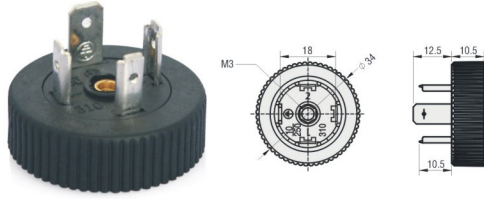

A型插座, 方形 四个固定孔

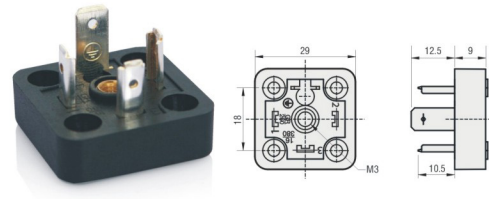

订货号  
Ordering-No.

针数  
Contacts

订货号  
Ordering-No.

2+PE

YG-DCF-3A-YZ

3+PE

YG-DCF-4A-YZ

针数  
Contacts

订货号  
Ordering-No.

2+PE

YG-DCF-3A-EZ


3+PE

YG-DCF-4A-EZ


图例  
Figure

尺寸图  
Drawing

A型仪表表插座

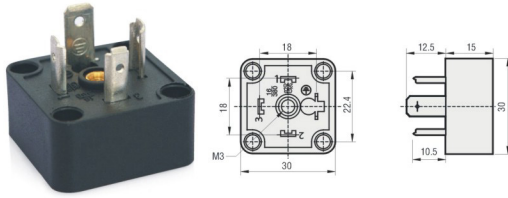

A型仪表表插座

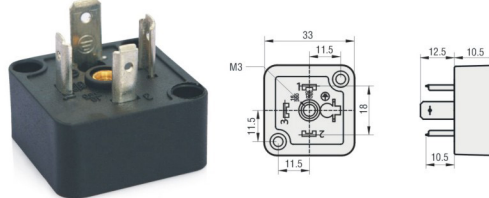

订货号  
Ordering-No.

针数  
Contacts

订货号  
Ordering-No.

2+PE

YG-DCF-3A-BZ

3+PE

YG-DCF-4A-BZ

针数  
Contacts

订货号  
Ordering-No.

2+PE

YG-DCF-3A-EZ

3+PE

YG-DCF-4A-EZ

技术参数  
Specifications

针数	2+PE/3+PE	Number of contacts
锁紧方式	中心螺钉/central screw	Locking s/stem
连接方式	焊接/solder	Termination
连接截面mm <sup>2</sup>	1.5mm <sup>2</sup> (max,AWG16)	Wire gauge in mm <sup>2</sup>
电缆直径	M3×35mm	Cable outlet(mm)
外壳防护等级	IP65	Shell protection
机械寿命	>50周期/>50 mating cycles	Mechanical operation
高温	+120℃	Upper temperature
低温	-30℃	Lowertemperature
额定电压	250V	Rated voltage
测量冲击电压	4000V	Rated imoulse voltage
污染等级	3	Pollution degree
过电压保护等级	III	Overvoltage categorie
绝缘组别	III	Material group
额定电流(40℃)	1A,2A,10A	Rated current(40℃)
过渡电阻	≤15mΩ	Contact resistance
触点、针	CuSn(Bronze/bronze)	Pin contact
触点表面	Ni(镍/nickel)	Contact plating
电缆插头外壳	PA(UL94HB)	Housing canle connector